

Note:

Engine hood was fitted and bolted in an unfinished body shell.

Unpainted surfaces become visible after subsequent movement.

These surfaces must be touched up with paint in the body color.


The luggage compartment lid wire harness does not have a point of connection.

Wire harness must be removed from the luggage compartment lid to remove the luggage compartment lid.

Disconnect gas pressure props.

Caution!

Gas pressure props have strong tension.

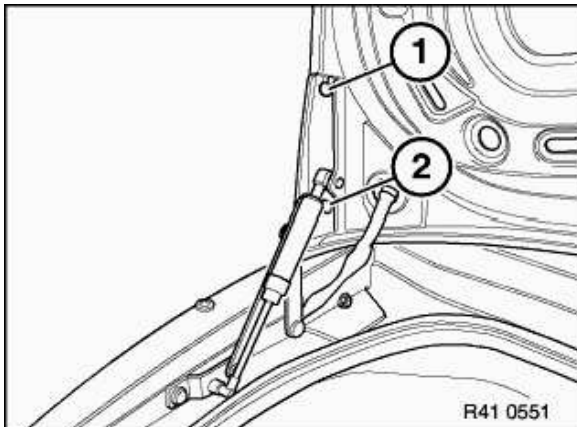

Loosen left and right bolts (1).

Unscrew left and right bolts (2).

Remove trunk lid.