


Unscrew and remove license plate.

Open trunk lid.

Lift out clips (1) with special tool 00 9 321 (folding leg).



Pull off rear trim panel (1) all around, lift over lock cylinder (2) and remove towards rear.

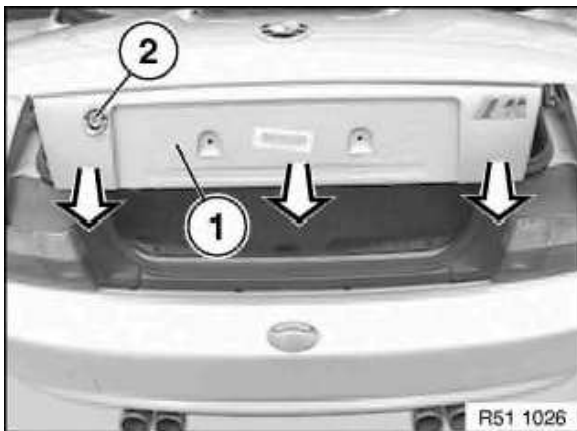

Installation:

Retaining lugs (6) must not be damaged.

Clean boot lid.

Pull off adhesive strips (1 ... 5), clean cementing surface and apply adhesive strips (1 ... 5).

Upper adhesive strips (1) must be shortened by 5 mm to apply to top side, as otherwise a gap results.

