


Move connector upper section (1) and connector lower section (2) against each other in direction of arrow.

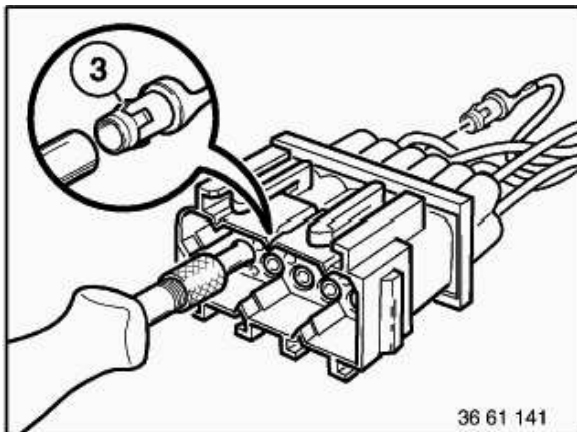

With special tool 61 1 132 (ejector), press back arrester hook (3) of appropriate contact and pull out cable.