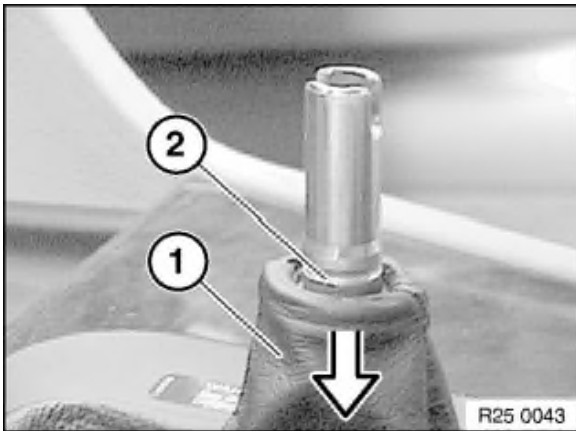
**Note:**

Do not twist handle during removal as this would cause the turning lock in the knob to shear off.

Tug firmly to remove knob.

Installation:

Fit knob on selector lever, align and press on until it snaps noticeably into place.

**Installation:**

Push rubber gaiter (1) down until groove (2) is exposed.