


(Bumper removed)

(If necessary remove rear bumper, refer to 51 12 000)

Left shock absorber:


Press floor mat (1) to one side and unfasten nut (2).

Tightening Torque, refer to Technical Data 51 12 3AZ

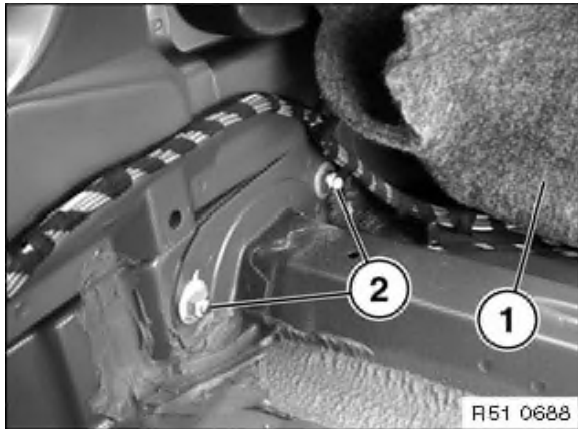

Unfasten nut (1) and remove shock absorber (2).

Tightening Torque, refer to Technical Data 51 12 3AZ

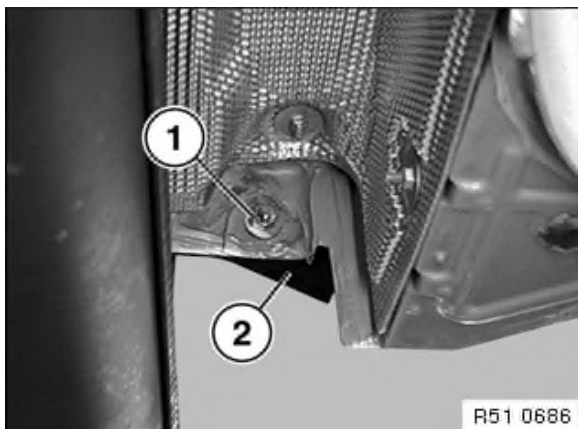

Right shock absorber:

Press floor mat (1) to one side, unfasten nut (2) and pull out shock absorber.

Installation:

Tightening Torque, refer to Technical Data 51 12 3AZ

Adjust rear bumper,
refer to 51 12 000

