
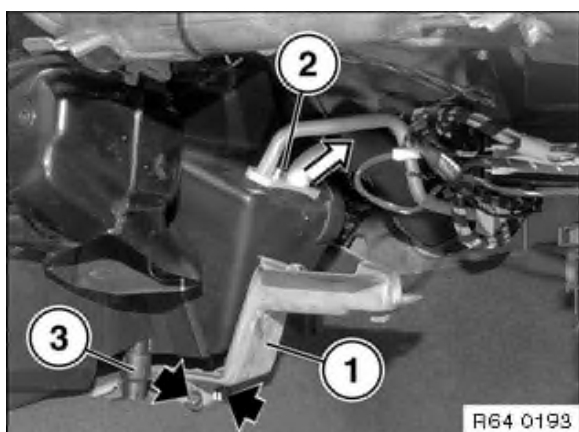


Air conditioner drained,
refer to 64 50 009

Unfasten screws and remove pipes.

Installation:

Replace O-rings

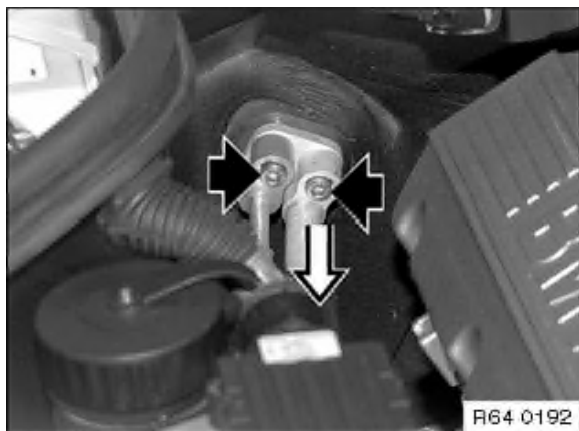

Unscrew holder (1).


Unfasten screw (2) and slide pipes upwards with pressure plate

Installation:

Replace O-rings



Loosen screws and take off cover.

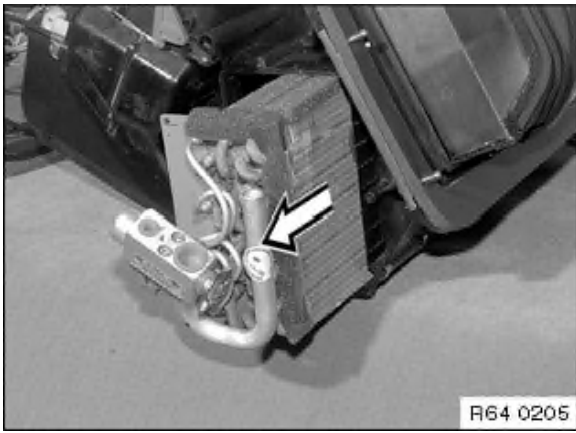


Pull out evaporator.

Installation:

Replace O-rings

After installation evacuate, fill and check air-conditioning system for leaks.

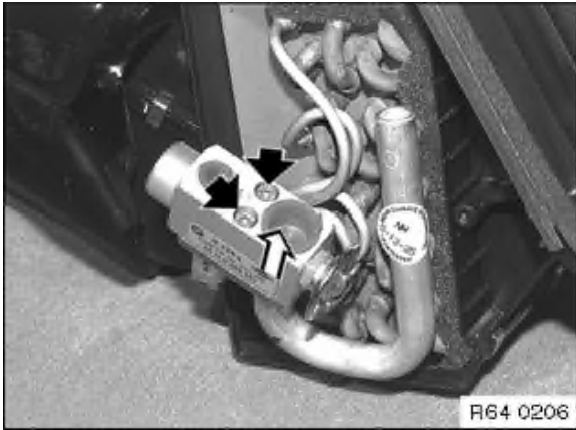

Unfasten screws and fit expansion valve.

Installation:

Replace O-rings